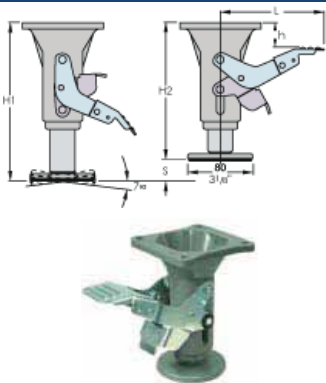




Reflex CASTORS AND WHEELS

Floor Locks / accessories

REFLEX
equip

2 of 2

| Floor locks | Fork Options | Code | Specifications | | | | | | | | |
|---|--|--|----------------------------------|-------------------------|----------------------------------|-----------------------|----------------|-----------------|--------------------|-------------------------|-------------------|
| | | | Comparable Fallshaw Castor Range | Carrying Capacity kg/lb | Mounting Height mm/inch | H1 | H2 | S | L | h | Unit weight kg/lb |
|  |  | 909-125 O125 (page 21) H125 (page 22) | 810kg 1785lb | 168 6 11/16 | 173 6 15/16 | 148 5 7/8 | 25 1 | 126 5 | 29 1 1/8 | .810kg 1.87lb | |
| | | 909-150 O150 (page 21) H150 (page 22) | 850kg 1875lb | 190 7 1/2 | 195 7 11/16 | 170 6 11/16 | 25 1 | 126 5 | 29 1 1/8 | .850kg 1.78lb | |
| Heavy duty friction pad for greater load stability <ul style="list-style-type: none"> • Cast iron construction • Simple pedal-on, pedal-off operation • Use two truck locks when four swivelling castors are fitted - mount at each end between castors • Thick elastic rubber friction pad provides firm grip • Holds trolley firmly in position without lifting • Moderate - smooth operating force • Suitable for work platforms, servicing stands, heavy trolleys, mobile machinery, work benches & cradles. |  | Code | Specifications | | | | | | | | |
| | | Top Plate | O/All Height Closed | O/All Height Open | Mount Height | | | | | | |
| | | 152X114 6x4 1/2 12mm holes 1/2" holes | 163 6 3/8 | 206 8 1/8 | 200 7 7/8 (exactly) | | | | | | |

www.reflexequip.com.au

REFLEX

MELBOURNE
(03) 9763 9644
rowville@reflexequip.com.au

SYDNEY & ILLAWARRA
(02) 9725 3266
smithfield@reflexequip.com.au

CENTRAL COAST & NEWCASTLE
(02) 4324 3455
gosford@reflexequip.com.au